


**M-808-CT
KL**

HAND TRUCK WHEEL

Hand truck wheel, axle Ø 20mm

M-808-CT KL is a hand truck wheel with solid polyurethane tire.

- Puncture proof (solid polyurethane) tire and non-Marking.
- High density carefree tire, resistant to temp: -25° to + 60°.
- Dimensions Ø260x85mm.
- Plastic rim with double sealed ball bearing, axle Ø20mm.
- Capacity: 200 Kg.

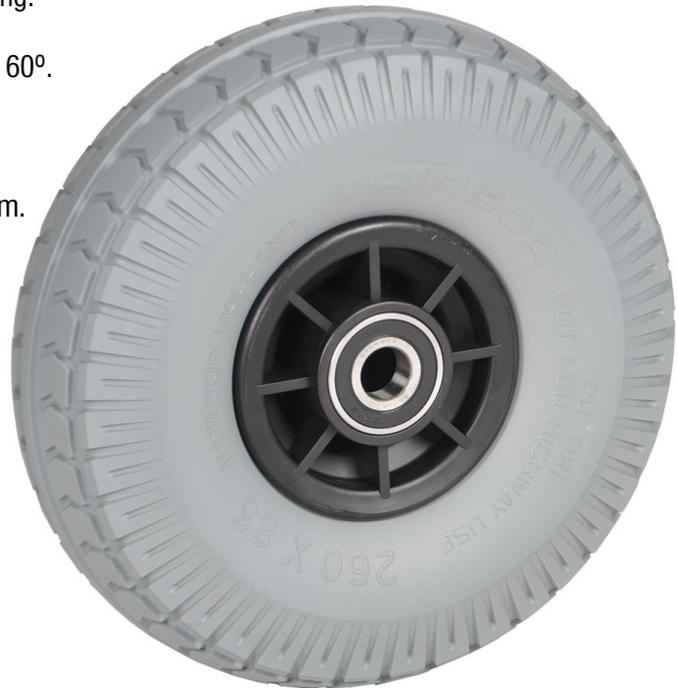

13653
M-808-CT KL

- Puncture proof (solid polyurethane) tire and non-Marking.
- High density carefree tire, resistant to temp: -25° to + 60°
- Dimensions Ø260x85mm.
- Plastic rim with double sealed ball bearing, axle Ø 20mm.
- Capacity: 200 Kg.



Cap. (kg)	Dimensions Ø x W (mm)	Weight (kg)	Axle Ø (mm)	Tire	Material tire	Material rim	Material Starlock cap	Article	Art. nr
200	260x85	1,6	20	Puncture proof	Solid Polyurethane	Plastic with double sealed ball bearing		M-808-CT KL	13653
	Inner 20 outer 36	0,01					varnished / stainless steel	M-981.20 Starlock cap to secure tire	11220