


M-800-CT-25

# WHEELBARROW WHEEL

## Puncture proof PU wheelbarrow wheel with steel rim

M-800-CT puncture-proof wheelbarrow wheel with steel rim.

- Puncture proof (foamed Polyurethane).
- High density care free tyre.
- Steel rim with double closed ball bearings.
- Ø20mm axle.
- Axle length 250mm.
- Indestructible and stays on course.
- Capacity: 200 Kg.
- Rim is completely powder-coated in gray. Resistant powder coating. (no solvents, less harmful to the environment).

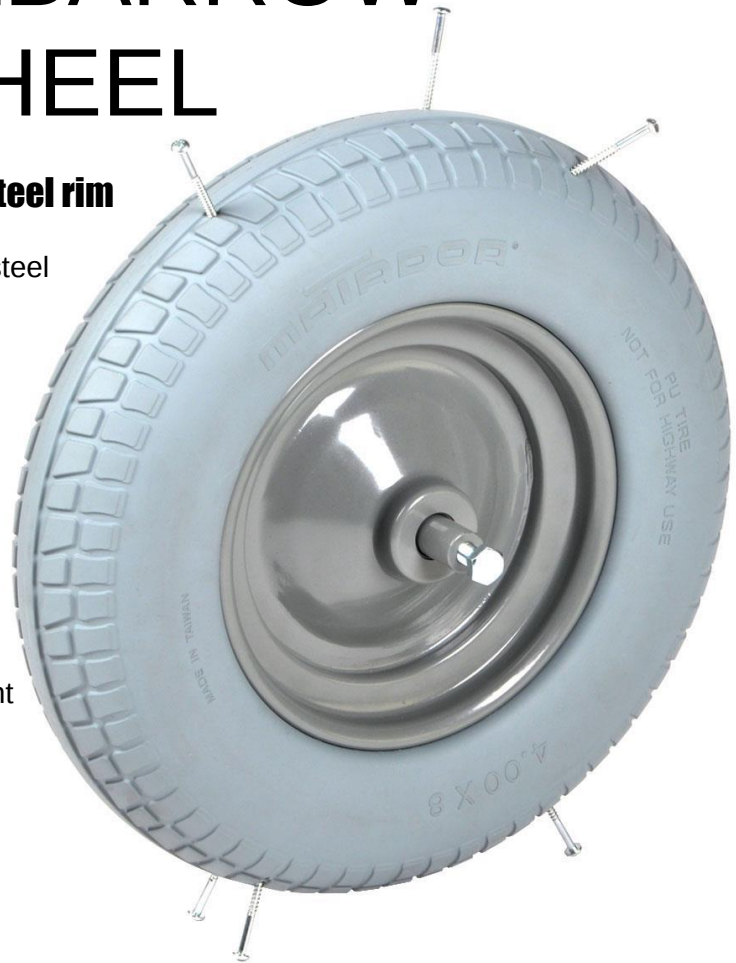

- Puncture proof (foamed Polyurethane).
- High density care free tyre.
- Steel rim with double closed ball bearings.
- Ø20mm axle.
- Axle length 250mm.
- Indestructible and stays on course.



12219  
M-800-CT-25

| Cap.<br>(kg) | Dimensions<br>ØxW<br>(mm) | Weight<br>(kg) | Axle<br>length | Axle<br>Ø mm | Tyre              | Material tyre               | Material rim                | Article     | Art.<br>nr. |
|--------------|---------------------------|----------------|----------------|--------------|-------------------|-----------------------------|-----------------------------|-------------|-------------|
| 200          | 400-8/16x4"<br>400x100    | 4,8            | 250            | 20           | Puncture<br>proof | PU (foamed<br>Polyurethane) | Steel, gray<br>powdercoated | M-800-CT-25 | 12219       |