

WHEELBARROW EASY-RIDER WITH LIFTING EYES

Very strong construction wheelbarrow with, lift eyes and pneumatic tyre, cap. 80 Liter

M-115-L4 Easy-Rider is a construction wheelbarrow with lifting eyes and puncture-proof tyre.


- Stronger - even more ergonomic!
- Less weight at full load.
- Strong rectangular tray (1.2 mm), with tray support.
- Base frame made of oval tube 38x20mm.
- Very strong chassis made of 25 mm round tube.
- Continuous oval tube frame and back under tray.
- Improved balance.
- Steel rim with double closed ball bearings.
- Ergonomic by higher placed handles (610mm), less stoop, easier to lift.
- Barrier-free emptying.
- Ergonomic natural rubber safety handles especially devised to the form of your hand.
- Wear pads to extend the lifetime of the legs.
- Horizontal grip, making the wrist straight and not bent and 4 instead of 2 fingers carry the load.
- Simple and easy to empty because of the lower fronthead.

Safety instructions:

- Check the wheelbarrow for damage or excessive rust before lifting.
- Only lift this wheelbarrow using a certified equilateral 4 leg sling with a minimum leg length of 1 metre.
- Only use hooks or shackles in the lifting eyes of the wheelbarrow, do not use a sling.
- The wheelbarrow has a maximum working load of 200kg.
- Do not use the wheelbarrow to lift people.
- Never lift the wheelbarrow over people.
- Modifications to the wheelbarrow are not allowed.
- Do not mount the lifting eyes to other objects.
- Make sure the centre of gravity of the load is located between the lifting eyes.
- The load must be contained within the wheelbarrow tub and may not stick out.
- Replace the maximum work load marking if it has become illegible.



17618
M-115-L4 Lifting eyes

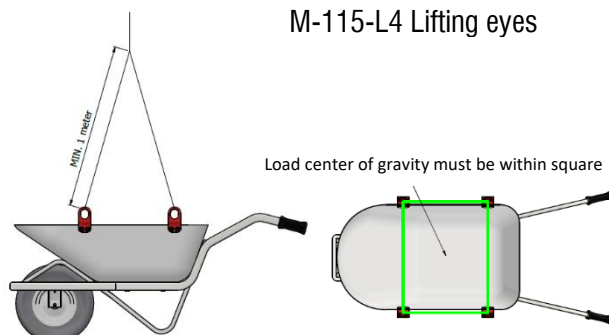

12337
Ergo handgrip with knuckle protection



11170
M-800-L4

Cap. (kg)	Dimensions LxWxH (mm)	Dim. tray LxWxH (mm)	Weight (kg)	Wheel Ø(mm)	Tyre	Color Chassis	Color Tray	Handgrip LxW (mm)	Article	Art. nr
200	1450x590x620	880x590x300	18,2	400	Pneumatic	Gray	Gray	38x20	M-115-L4 Lifting eyes	17618
250	400x100		3	400	Pneumatic				M-800-L4	11170
	130x58x90		0,18					38x20	M-970-Z RUB	12337